



NORPLAST PVC 379 SCIROPPO

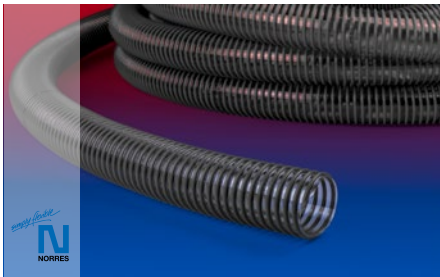

Suction/discharge hose

Applications:

- for liquids, pulverized or grainshaped products, granulates, pellets etc. and for lead through of non fatty liquid foodstuffs

Properties

- According to the norm EN ISO 1307:2008

Temperature Range

- -15°C to 60°C

Design

- PVC inner layer
- PVC outer layer
- Slightly corrugated construction cover
- Rigid PVC spiral
- smooth interior

Delivery variants

- transparent inner tube, transparent exterior wall, dark grey spiral

I.D.	Outer Ø	Pitch	Vacuum	Operating pressure	Bending radius	Weight	Production lengths	Order No.
inch/mm	mm	mm	bar	bar	mm	kg/m	m	
1,25 / 32	39,00	8,00	0,700	6,000	128,00	0,38	50	7844-0032-005

Accessories



CLAMP 211