

PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN

SERIE 160 DN16



Materials





Material Code

A = Brass Chrome Plated

B = Brass Chrome Plated

S = Brass Chrome Plated

0 - 25 bar


-40° to + 105°C (NBR)

Shut Off Type

OM 300 - 02000
CON - 2450 - 1800 - 20

FULL FLOW

DN 16 mm

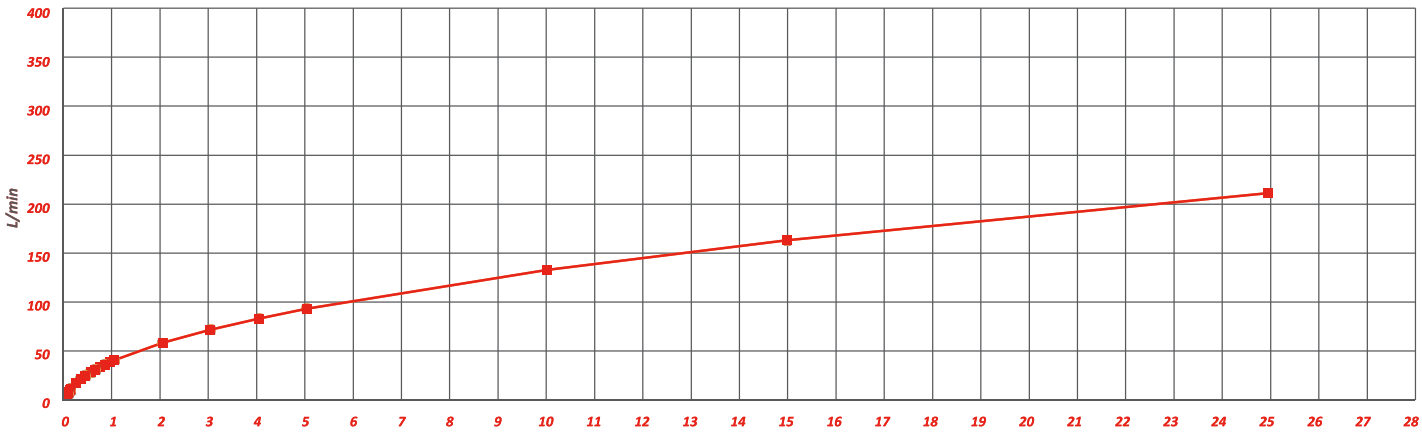


Options

AISI303 Stainless Steel

AISI316 Stainless Steel

FPM

Plug Profile Serie 160



Compatible with

DYROS	2000
NITO	3/4" (5360)




PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN

SERIE 160


UNVALVED QUICK COUPLINGS SCHNELLKUPPLUNGEN OHNE VENTIL

with female thread



Connection	Part No.	ØD	L
BSP 3/4"	160 DGF 26	35	31,5


with standard hose tail



Connection	Part No.	ØD	L
Ø 19	160 HGF 19	35	54,8


PLUGS STECKNIPPEL

with male thread




Connection	Part No.	L	SW
BSP 3/4"	160 EU 26	35	27

with male thread HEX




Connection	Part No.	ØD	L
BSP 3/4"	160 EU 26 - 01	27	35

with female thread



Connection	Part No.	ØD	L
BSP 3/4"	160 DU 26	30	35,5


with standard hose tail



Connection	Part No.	ØD	L
Ø 13	160 HU 13	21,8	47
Ø 19	160 HU 19	21,8	50

ADAPTER ADAPTER

with plastic hose tail



Connection	Part No.	ØD	L
BSP 3/4" - Ø19	160 GU 19	BSP 3/4"	35,3