GMS HADICE

Čestné prohlášení:

Certifikát 2.1 pro výrobek:

Kód produktu: 10302



Obchodní název a popis:

AEROTEC PVC FLEX ELA

Antistatická ohebná tlaková hadice pro vzduch, -20°C až +70°C, 15 bar

&

NOBELAIR AS/R

Výrobce: HOZELOCK TRICOFLEX

- Pracovní teplota: **-20°C až +70°C**
- Pracovní tlak: **15 Bar**
- Bezpečnost: **4 : 1**
- Použití produktu: **Antistatická ohebná hadice pro tlakový vzduch speciálně navržená pro dodávku vzduchu k dýchacím přístrojům v lakovnách, v petrochemickém průmyslu a jaderných elektrárnách.**
- Vlastnosti: **Extrémní pružnost, nízká hmotnost, odolná tukům a olejům**
- Materiál vnitřní: **PVC**
- Materiál vnější: **PVC**
- Výztuha: **Polyesterový oplet**
- Spirála: **--**
- Médium: **Tlakový vzduch**
- Norma: **EN ISO 5359, EN 14593 a EN 14594 N°2011/65/EU; N° CE 1907/2006**
- Vodivost: **Elektricky vodivá R=<10*6 Ω/m**
- Barva vnitřní: **Černá**
- Barva vnější: **Modrá**
- Zkrácená poznámka: **Hadice se dodává pouze na základě objednávek. Uvedené parametry v tabulce platí při teplotě 20°C. Při 70°C je provozní tlak 6 bar,** viz diagram výrobce (modrá barva), kde je uvedena závislost pracovní teploty na tlaku média. Pro spojení do koncovek doporučujeme obrátit se na odborníky a zalisovat strojně oba konce. Při měření mezi koncovky musí dojít k vodivosti.

GMS hadice, s.r.o. | Nádražní 491 Lanškroun 56301 | IČO: 25954113 DIČ: CZ25954113 | tel.: 465 323 825 e-mail: info@gms.cz | www.gms.cz

GMS HADICE

Originální katalogový list:

NOBELAIR® AS/R

60 bar

+70 / -20 °C



1. Matt blue or green oil resistant PVC outer covering
2. 4. Inner intermediate PVC layer
3. Textile reinforcement in polyester
5. Antistatic black inner PVC wall

Reinforced hose for Breathing air.

In accordance with EN 14593 and EN 14594 standards. Antistatic, heat resistant and 5 layer construction with polyester reinforcement.

APPLICATIONS

Specially designed for compressed air supply to individual protective apparatus which are in accordance with the EN 14593 and EN 14594 standards

ADVANTAGES

NOBELAIR® AS/R hose is a top of the range hose, linking comfort of use to resistance in the most arduous conditions. Its extremely flexible, lightweight and user friendly.
Its considerable thickness ensures a retained profile. The well balanced reinforcement provides it with excellent dimensional stability.
The antistatic inner layer of NOBELAIR® AS/R breathing air hose is a guarantee of safety if use in hazardous environments (paint booths, presence of hydrocarbons...). This capability is permanent, obtained by the addition of carbon directly into the hose material.

SECTORS OF ACTIVITY

Nuclear power plants, petrochemical industry, paint application in building and manufacturing

CONNECTORS

WARNING


Metal connectors must be used to maintain electrical continuity: Quick connectors, barbed or serrated connectors. Swaged fittings can be used if they do not damage the hose.

CONTINUOUS USE UP TO 70°C
AT 6 BAR (80° AT PEAK)

RESISTIVITY $<10^6$ /M
COMPLIES WITH NF EN ISO 8031

CHEMICAL RESISTANCE

See table pages 102 to 105 column B for outlayer, col. A for innerlayer.

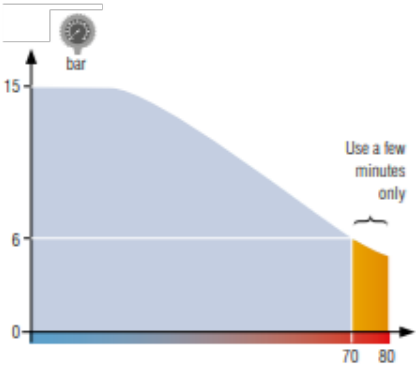

LANŠROUN
OLOMOUC
OSTRAVA
PARDUBICE
PRAHA
ZLIN

GMS hadice, s.r.o.
Nádražní 491
Lanškroun 56301
IČO: 25954113
DIČ: CZ25954113
tel.: 465 323 825
e-mail: info@gms.cz
www.gms.cz

GMS HADICE

TRICOFLEX

DECLARATION OF CONFORMITY

We, TRICOFLEX SAS, ZI Avenue Jean Juif, 51300 Vitry le François, certify that hoses:

NOBELAIR® AS/R EN ISO 5359

- Comply with the European Norm EN ISO 5359 as they passed each tests mentioned on this standard,
- Comply with RoHS regulation n°2011/65/EU,
- Comply with REACH regulation n° CE 1907/2006,
- Don't contain any DEHP or any substance among the SVHCs candidate list.

We remain at your disposal for any further information.

Yours sincerely,

Vitry-le-François, France

the 6th June 2017

Isabelle FLEURIET
Quality Manager

TRICOFLEX SAS
ZI Avenue Jean Juif
51300 Vitry le François
FRANCE
Tél : +33 (0)3 26 73 67 67
Fax : +33(0)3 26 73 67 64

Za velkoobchod GMS hadice, s.r.o.

Vypracoval:
Fabián Karel,
produktový manažer

Schválil:
Jan Tovtík,
ředitel společnosti

GMS HADICE
KVALITA SKLADEM

GMS hadice s. r. o.
Nádražní 491
563 01 Lanškroun
IČ: 25954113
DIČ: CZ25954113
tel.: 465 323 825
www.gms.cz

V Lanškrouně dne 02.09.2024