




AGRASTEAM 170°C

TUBO LAVAGGIO VAPORE - FDA | FDA WASHDOWN HOSE
TUYAU FDA LAVAGE | FDA -DAMPF WASCHENSCHLAUCH

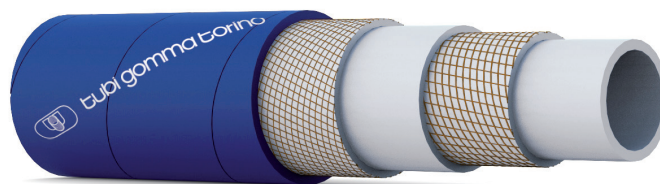

🇮🇹 APPLICAZIONE	🇬🇧 APPLICATION	🇫🇷 APPLICATION	🇩🇪 ANWENDUNG
Mandata acqua calda mista a vapore per lavaggio e sterilizzazione di pavimenti ed attrezzature nell'industria alimentare e allevamenti	Washdown hose for food industry floors and equipments	Tuyau pour le nettoyage et la sterilization dans l'industrie alimentaire	Lebensmittel-Dampfschlauch, für Heißwasser und Dampf, für Reinigungszwecke in der Lebensmittelindustrie
SOTTOSTRATO	TUBE	TUBE INTÉRIEUR	INNENSEELE
Bianco, liscio in gomma EPM , di qualità alimentare, inodore ed insapore	White, smooth EPM rubber compound, food quality odourless and taste free	Blanc, lisse en caoutchouc EPM , inodore et sans saveur	Weiß, glatt, Lebensmittelqualität EPM , geruchs- und geschmacksfrei
RINFORZO	REINFORCEMENT	ARMATURE	EINLAGEN
Tessuti sintetici ad alta tenacità	High strength synthetic plies	Nappes synthétiques très résistantes	Hochreißfestes synthetisches Cordgewebe
COPERTURA	COVER	REVÊTEMENT EXTÉRIEUR	DECKE
Blu, liscia ad impressione tela in gomma EPDM , resistente all'abrasione, all'ozono e agli agenti atmosferici	Blue, smooth, cloth impression EPDM rubber, resistant to abrasion, ozone and weathering	EPDM bleu, lisse, grain toile, résistant à l'abrasion, à l'ozone et aux agents atmosphériques	Blau, stoffgemustert, EPDM -Qualität, abrieb-, Ozon- und witterungsbeständig
NORME	SPECIFICATIONS	NORMES	NORMEN
FDA titolo 21, articolo 177.2600 per alimenti acquosi	FDA title 21, art.177.2600 for aqueous foods	FDA titre 21, article 177.2600 pour aliments aqueux	FDA Titel 21, Art. 177.2600 für flüssige Nahrungsmittel
TEMPERATURA D'ESERCIZIO	WORKING TEMPERATURE	TEMPÉRATURE	BETRIEBSTEMPERATUR
Acqua calda -40°C +100°C PE 21 Bar	Hot water -40°F +212°F WP 21 Bar	Eau chaud -40°C +100°C PT 21 Bar	Heißes Wasser -40°C +100°C Betriebsdruck 21 Bar
Vapore max +170°C PE 7 Bar	Steam max +338°F WP 7 Bar	Vapeur max +170°C PT 7 Bar	Dampf max +170°C Betriebsdruck 7 Bar

ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
13	1/2	24	61/64	0,42	7	105	70	1050	40
16	5/8	26	1 5/16	0,51	7	105	70	1050	40
19	3/4	31	1 7/32	0,65	7	105	70	1050	40
25	1	37	1 29/64	0,80	7	105	70	1050	40
32	1 1/4	46	1 13/16	1,00	7	105	70	1050	40
38	1 1/2	52	2 3/64	1,10	7	105	70	1050	40
51	2	65	2 9/16	1,60	7	105	70	1050	40

Identificazione / Branding / Marquage / Kennzeichnung



AGRASTEAM



W.P. 21 BAR
HOT WATER
170 °C

W.P. 7 BAR
STEAM
170 °C

AL-FDA
PHthalate FREE



ITALY