

Two-layer soft PVC hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and ducting of food liquids.



 SMOOTH SURFACE \*\*\*\*\*

 FLEXIBILITY \*\*\*

 TEMPERATURE RANGE  
-5 °c 65 °c

 CHEMICAL RESISTANCE  
PVC Table

 CRUSHING RESISTANCE \*\*\*

 FOR FOOD  
EU according to Declaration of Conformity.

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23° m/H <sub>2</sub> O	working press. at 23° r.1:3 bar	working press. at 23° r.1:4 bar	bursting press. at 23° bar	bending radius mm	total thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Availability
19	3/4	19	28	9	20	15	60	80	4.5	1	8.5	right	450	60	In stock
25	1	25	35.5	9	20	15	60	90	5.25	1.2	9	right	670	60	In stock
30		30	40.5	9	16	15	48	105	5.25	1.2	9.5	right	770	60	In stock
32	1 1/4	32	42.5	9	16	12	48	110	5.25	1.2	9.5	right	800	60	In stock
35		35	47	9	14	10	42	125	6	1.4	10	right	1100	60	On demand
38	1 1/2	38	51	9	14	10	42	135	6.5	1.4	10.5	right	1150	30	In stock
40		40	53.5	9	14	10	42	140	6.5	1.4	11	right	1200	30	In stock
45	1 3/4	45	58	9	14	10	42	155	6.5	1.4	11	right	1400	30	On demand
50	2	50	63.5	9	14	10	42	170	6.5	1.6	11	right	1600	30	In stock
60		60	74	9	12	10	36	200	7	1.6	11	right	1980	30	In stock
63	2 1/2	63	77	9	12	10	36	210	7	1.6	11	right	2050	30	In stock
70		70	85.5	9	12	10	36	240	7.8	2	13.5	right	2550	30	On demand
76	3	76	92	9	12	9	36	250	8	2	13.5	right	2800	30	On demand
80		80	96	9	10	8	30	300	8	2	14	right	2850	30	In stock
90	3 1/2	90	106.5	9	10	8	30	350	8.25	2	14	right	3300	30	On demand
102	4	102	119	9	10	8	30	400	8.5	2	14.5	right	3900	30	On demand
105		105	122	9	10	8	30	420	8.5	2	14.5	right	4000	30	On demand
120		120	138	9	8	6	24	480	9	2.5	15	right	4800	20	In stock
127	5	127	145	9	7	5	21	500	9	2.5	15	right	5200	20	On demand
150		150	169	9	5	3	15	600	9.5	2.5	15.5	right	6650	20	On demand
152	6	152	171	9	5	3	15	600	9.5	2.5	15.5	right	6700	20	In stock
200		200	222	9	3	2.5	9	650	11	3	11	right	9700	10	On demand
203	8	203	225	9	3	2.5	9	650	11	3	11	right	10000	10	On demand

## VACUPRESS® CRISTAL

Tubo in PVC plastificato a due strati con spirale in acciaio zincato incorporata e rinforzo in fibra poliestere, per aspirazione e passaggio liquidi alimentari.

- 
**SUPERFICI LISCE**  
 SMOOTH SURFACE \*\*\*\*\*

---

- 
**FLESSIBILITÀ**  
 FLEXIBILITY \*\*\*

---

- 
**RESISTENZA ALL'ABRASIONE**  
 ABRASION RESISTANCE ISO 4649: 90 mm<sup>3</sup>±10%

---

- 
**TEMPERATURA D'IMPIEGO**  
 TEMPERATURE RANGE -5° C + 65° C

---


- 
**RESISTENZA CHIMICA**  
 CHEMICAL RESISTANCE tabella PVC

---

- 
**RESISTENZA ALLO SCHIACCIAMENTO**  
 CRUSHING RESISTANCE \*\*\*

---

- 
**IDONEO AL CONTATTO CON ALIMENTI SECONDO DDC**  
 SUITABLE FOR CONTACT WITH FOODSTUFF ACCORDING TO THE DECLARATION OF CONFORMITY

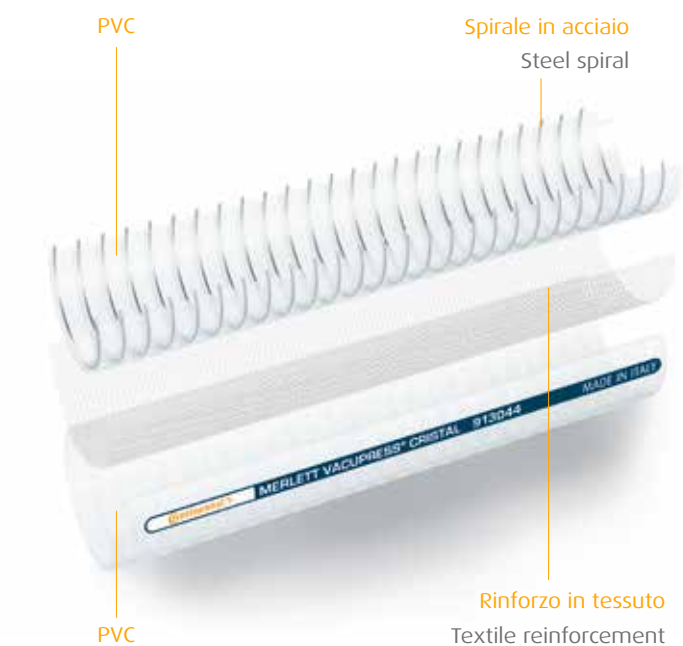

## 913044



Two-layer plasticized PVC hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of food liquids.

Ø INTERNO Ø I.D.	Ø INTERNO Ø I.D.	Ø ESTERNO Ø O.D.	PESO WEIGHT	RAGGIO CURVATURA BENDING RADIUS	PRESS. ESERCIZIO WORKING PRESS.	PRESS. SCOPPIO BURSTING PRESS.	SOTTOVUOTO VACUUM	LUNG. ROTOLI COIL LENGTH
inch	mm	mm	g/m	mm	bar	bar	m H <sub>2</sub> O	mt
3/4	<b>19</b>	28	450	80	20	60	9	60
1	<b>25</b>	35,5	670	90	20	60	9	60
	<b>30</b>	40,5	770	105	16	48	9	60
	<b>32</b>	42,5	800	110	16	48	9	60
1 1/4	<b>35</b>	48	1100	125	14	42	9	60
	<b>38</b>	51	1150	135	14	42	9	30
1 1/2	<b>40</b>	53	1200	140	14	42	9	30
	<b>45</b>	58	1400	155	14	42	9	30
	<b>50</b>	63,5	1600	170	14	42	9	30
2 1/2	<b>60</b>	74	1980	200	12	36	9	30
	<b>63</b>	77	2050	210	12	36	9	30
	<b>76</b>	92	2800	250	12	36	9	30
3	<b>80</b>	96	2850	300	10	30	9	30
	<b>90</b>	106,5	3300	350	10	30	9	30
	<b>102</b>	119	3900	400	10	30	9	30
4	<b>120</b>	138	4800	480	8	24	9	20
	<b>127</b>	145	5200	500	7	21	9	20
5	<b>152</b>	171	6700	600	5	15	9	20

