


# SUPER THERMOCLEAN® 40

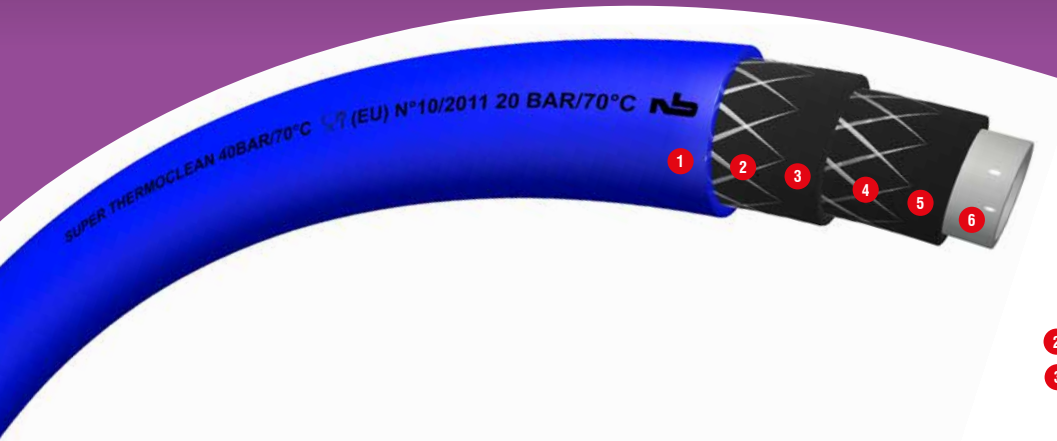

- 1 Blue cover in flexible, non-staining, greaseproof, detergent and disinfectant resistant food grade PVC
- 2 4 Double polyester reinforcing
- 3 5 Intermediary layers in flexible PVC
- 6 Inner surface in flexible grey PVC

## Average pressure industrial washing hose (40 bar at 70°C).

Six-layer design with double polyester fibre reinforcing.

### APPLICATIONS

Industrial cleaning

### SECTORS OF ACTIVITY

Dairy industry, communities, shopkeepers, craftsmen, slaughterhouses, industrial uses

### SIMULANTS A, B, C

- fruit juices
- wines



### Marking

SUPER Thermoclean® 40 BAR / 70°C (EU) N° 10/2011 [year of fabrication] [Batch number]

### ADVANTAGES

Super material properties of SUPER THERMOCLEAN® 40 make it a high-performance, safe and reliable hose capable of meeting severe conditions:

- exceptional temperature performance (up to 70°C under 40 bar continuously, peaks possible up to 80°C);
- six highly flexible layers provide excellent handling;
- non-staining blue outer surface is resistant to oily products and detergents;
- excellent kinking resistance.

### CONNECTORS


Barbed connectors with 'O' type clips (retighten the clips after first high temperature use).

Crimping is possible under certain conditions (please consult us).

### CHEMICAL RESISTANCE

See table pages 102 to 105 column B.

											Blue		
12	+/- 0.6	22	+/- 0.8	5	335	240	120	80	40	84	25 m	50 m	100 m
											100758	100761	100774

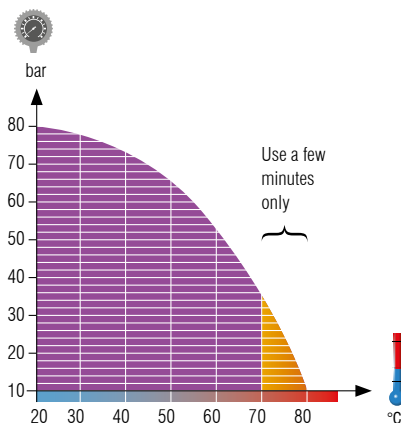

**MAXIMUM WORKING PRESSURE**  
40 BAR AT 70°C