


Multilayer rubber hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of milk. Conforms to FDA 21 CFR 177.2600 paragraph 'e' (liquid foodstuffs).

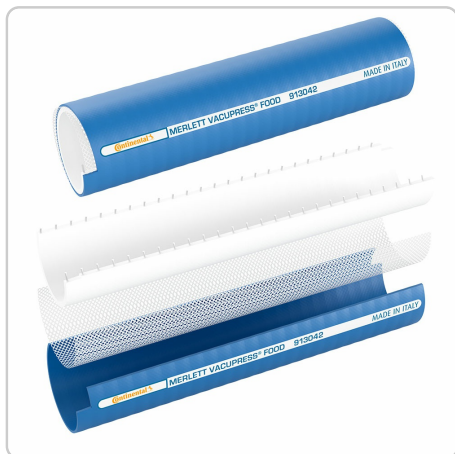

SMOOTH SURFACE \*\*\*\*\*

FLEXIBILITY \*\*\*\*\*

TEMPERATURE RANGE  
-25 °c 80 °c

CHEMICAL RESISTANCE  
TPV Table

CRUSHING RESISTANCE \*\*\*\*\*

FOR FOOD  
Produced ACCORDING to FDA 21 CFR 177.2600 par. "e" (watery foodstuff)

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23° m/H <sub>2</sub> O	working press. at 23° r.1:3 bar	working press. at 23° r.1:4 bar	working press. at 60° bar	bursting press. at 23° bar	bending radius mm	total thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Availability
19	3/4	19	28	9	16	14	12	48	70	4.5	1	8.5	right	380	60	On demand
22		22	31.5	9	16	14	12	48	75	4.8	1.2	9	right	450	60	On demand
25	1	25	35.5	9	16	14	12	48	80	5.3	1.4	10	right	580	60	In stock
30		30	40.5	9	13	10	9	39	85	5.3	1.4	10	right	650	60	On demand
32	1 1/4	32	42.5	9	13	10	9	39	90	5.3	1.4	10	right	730	60	On demand
35		35	47	9	13	10	9	39	95	6	1.4	10	right	900	60	On demand
38	1 1/2	38	50	9	13	10	7	39	100	6	1.4	10.5	right	920	30	On demand
40		40	52	9	10	9	7	30	110	6	1.4	11	right	970	30	In stock
42		42	54	9	10	9	7	30	115	6	1.4	11	right	1030	30	On demand
45	1 3/4	45	57	9	10	9	7	30	120	6	1.4	11	right	1100	30	On demand
50	2	50	62.5	9	10	8	7	30	130	6.3	1.6	11	right	1280	30	In stock
53		53	66	9	10	8	7	30	140	6.5	1.6	11	right	1350	30	On demand
54		54	67	9	10	8	7	30	150	6.5	1.6	11	right	1350	30	On demand
60		60	73	9	10	8	7	30	160	6.5	1.6	11	right	1550	30	In stock
63	2 1/2	63	76	9	10	8	7	30	180	6.5	1.6	11	right	1600	30	On demand
76	3	76	91	9	10	8	7	30	230	7.5	2	13.5	right	2350	30	On demand
80		80	95.5	9	10	8	7	30	250	7.3	2	14	right	2400	30	On demand
90	3 1/2	90	106	9	10	8	7	30	280	8	2	14	right	2750	30	On demand
102	4	102	118.5	9	10	8	6	30	310	8.3	2	14.5	right	3100	30	On demand

# VACUPRESS® FOOD

Tubo in gomma termoplastica multistrato con spirale in acciaio zincato incorporata e rinforzo in fibra poliestere, per aspirazione e mandata latte.

# 913042



Multi-layer Rubber hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of milk.

**SUPERFICI LISCE**  
SMOOTH SURFACE \*\*\*\*\*

**FLESSIBILITÀ**  
FLEXIBILITY \*\*\*\*

**RESISTENZA ALL'ABRASIONE**  
ABRASION RESISTANCE ISO 4649: 150 mm<sup>3</sup>±10%


**TEMPERATURA D'IMPIEGO**  
TEMPERATURE RANGE -25° C + 80° C

**RESISTENZA CHIMICA**  
CHEMICAL RESISTANCE tabella TPV

**RESISTENZA ALLO SCHIACCIAMENTO**  
CRUSHING RESISTANCE \*\*\*

**IDONEO AL CONTATTO CON ALIMENTI SECONDO DDC**  
SUITABLE FOR CONTACT WITH FOODSTUFF ACCORDING TO THE DECLARATION OF CONFORMITY

Conforme a FDA 21 CFR 177.2600 par. "e" (alimenti acquosi).  
Conform ACCORDING to FDA 21 CFR 177.2600 par. "e" (aqueous foodstuff).

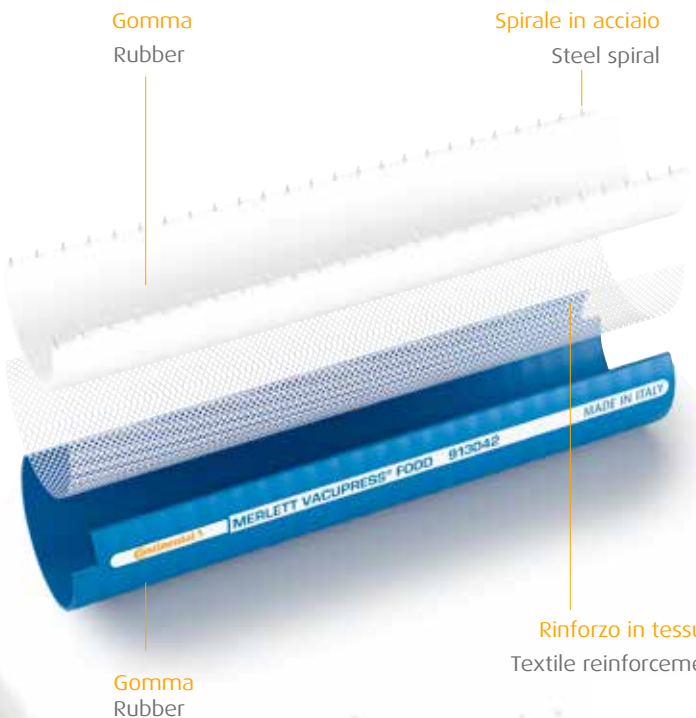

Ø INTERNO Ø I.D.	Ø INTERNO Ø I.D.	Ø ESTERNO Ø O.D.	PESO WEIGHT	RAGGIO CURVATURA BENDING RADIUS	PRESS. ESERCIZIO WORKING PRESS.	PRESS. SCOPPIO BURSTING PRESS.	SOTTOVUOTO VACUUM	LUNG. ROTOLI COIL LENGTH
inch	mm	mm	g/m	mm	20° 60° bar	bar	m H <sub>2</sub> O	mt
3/4	<b>19</b>	28	380	70	16 12	48	9	60
1	<b>25</b>	35,5	580	80	16 12	48	9	60
	<b>30</b>	40,5	650	85	13 9	39	9	60
1 1/4	<b>32</b>	42,5	730	90	13 9	39	9	60
	<b>35</b>	47	850	95	13 9	39	9	60
1 1/2	<b>38</b>	50	920	100	13 7	39	9	30
	<b>40</b>	52	970	110	10 7	30	9	30
1 3/4	<b>45</b>	57	1100	120	10 7	30	9	30
	<b>50</b>	63	1280	130	10 7	30	9	30
	<b>60</b>	73	1550	160	10 7	30	9	30
2 1/2	<b>63</b>	76	1600	180	10 7	30	9	30
	3	<b>76</b>	91	2350	230	10 7	30	9
<b>80</b>		95,5	2400	250	10 7	30	9	30
<b>90</b>		105,5	2750	280	10 7	30	9	30
4	<b>102</b>	118,5	3100	310	10 6	30	9	30

