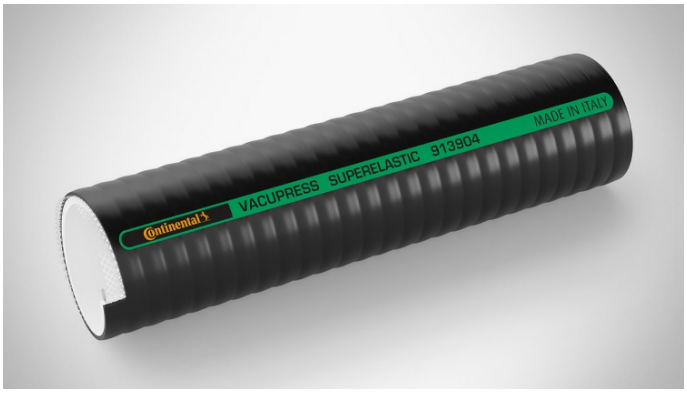


VACUPRESS SUPERELASTIC

913904

Two-layer flexible Food Quality PVC suction and delivery hose with embedded galvanized steel spiral and polyester yarn reinforcement, for suction and delivery of liquids also foodstuff.

DETAILS

SMOOTH SURFACE	✶✶✶✶✶
FLEXIBILITY	✶✶✶✶✶
ABRASION RESISTANCE	✶✶✶
TEMPERATURE RANGE	-25 °C 60 °C
CHEMICAL RESISTANCE	PVC Table
CRUSHING RESISTANCE	✶✶✶
FOR FOOD	EU according to Declaration of Conformity.
ANTI UV	2
O-PHTALATE FREE	✶✶✶✶✶

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23 °C m/H_2O	working press. at 23 °C r.1:3 bar	working press. at 23 °C r.1:4 bar	bursting press. at 23 °C bar	bending radius mm	total thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Availability
19	3/4	19	28	9	20	16	60	70	4.5	1	8.5	right	475	60	In stock
25	1	25	35.5	9	16	12	48	80	5.2	1.2	9	right	680	60	In stock
30		30	40.5	9	16	12	48	90	5.2	1.2	9.5	right	770	60	In stock
32	1 1/4	32	42.5	9	16	12	48	100	5.2	1.2	9.5	right	800	60	In stock
35		35	47	9	14	10	42	115	6	1.4	10	right	1100	60	In stock
38	1 1/2	38	51	9	14	10	42	125	6.5	1.4	10.5	right	1200	30	In stock
40		40	53	9	14	10	42	130	6.5	1.4	11	right	1220	30	In stock
45	1 3/4	45	58	9	12	10	36	140	6.5	1.4	11	right	1400	30	In stock
50	2	50	64	9	12	10	36	150	6.5	1.6	11	right	1600	30	In stock
60		60	74	9	12	10	36	180	7	1.6	11	right	2000	30	In stock
63	2 1/2	63	77	9	12	10	36	190	7	1.6	11	right	2100	30	In stock
75		75	91	9	12	9	36	190	8	2	13.5	right	2850	30	On demand
76	3	76	92	9	12	9	36	210	8	2	13.5	right	2900	30	In stock
80		80	96	9	10	8	30	220	8	2	14	right	2950	30	In stock
90	3 1/2	90	107	9	10	8	30	250	8.5	2	14	right	3500	30	In stock
100		100	117	9	10	8	30	295	8.5	2	14.5	right	3950	30	In stock
102	4	102	119	9	10	8	30	300	8.5	2	14.5	right	4000	30	In stock
120		120	138	9	8	6	24	350	9	2.5	15	right	5300	20	In stock
127	5	127	145	9	7	5	21	370	9	2.5	15	right	5800	20	In stock
150		150	169	9	5	3	15	480	9.5	2.5	15.5	right	6800	20	On demand
152	6	152	171	9	5	3	15	480	9.5	2.5	15.5	right	6850	20	In stock
200		200	222	9	3	2.5	9	650	11	3	22	right	10300	10	On demand
203	8	203	225	9	3	2.5	9	650	11	3	22	right	10500	10	On demand

All technical specifications apply to a temperature of 23° C ± 2° C (ISO 291)

The tolerance on all specifications ±5% (Tolerance Percentage is applicable on ALL DATA across our range)