

Two-layer soft PVC hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of liquids.



- 
SMOOTH SURFACE

- 
FLEXIBILITY

- 
TEMPERATURE RANGE
-25 °c 60 °c

- 
CHEMICAL RESISTANCE
PVC Table

- 
CRUSHING RESISTANCE

- 
ANTI-UV

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23° m/H ₂ O	working press. at 23° r.1:3 bar	working press. at 23° r.1:4 bar	bursting press. at 23° bar	bending radius mm	total thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	Segment Length m	coil length m	Availability
19	3/4	19	28	9	20	16	60	70	4.5	1	8.5	right	475		60	On demand
25	1	25	36	9	16	12	48	80	5.5	1.2	9	right	680		60	In stock
30		30	40.5	9	16	12	48	90	5.3	1.2	9.5	right	770		60	In stock
32	1 1/4	32	42.5	9	16	12	48	100	5.3	1.2	9.5	right	800		60	In stock
35		35	47	9	14	10	42	115	6	1.4	10	right	1100		60	On demand
38	1 1/2	38	51	9	14	10	42	125	6.5	1.4	10.5	right	1200		30	In stock
40		40	52	9	14	10	42	130	6	1.4	11	right	1200		30	In stock
45	1 3/4	45	58	9	12	10	36	140	6.5	1.4	11	right	1400		30	On demand
50	2	50	63.5	9	12	10	36	150	6.8	1.6	11	right	1600		30	In stock
60		60	74	9	12	10	36	180	7	1.6	11	right	2000		30	In stock
63	2 1/2	63	77	9	12	10	36	190	7	1.6	11	right	2100		30	In stock
75		75	91	9	12	10	36	190	8	2	13.5	right	2950		30	In stock
76	3	76	92	9	12	9	36	210	8	2	13.5	right	2970		30	In stock
80		80	96	9	10	8	30	220	8	2	14	right	3020		30	In stock
90	3 1/2	90	106.5	9	10	8	30	250	8.3	2	14	right	3500		30	In stock
100		100	117	9	10	8	30	300	8.5	2	14.5	right	4050		30	In stock
102	4	102	119	9	10	8	30	300	8.5	2	14.5	right	4150		30	In stock
120		120	138	9	8	6	24	350	9	2.5	15	right	5430		20	In stock
127	5	127	145	9	7	5	22	370	9	2.5	15	right	5950		20	In stock
150		150	169	9	5	3	15	480	9.5	2.5	15.5	right	7000		20	In stock
152	6	152	171	9	5	3	15	480	9.5	2.5	15.5	right	7050		20	In stock
200		200.5	222	9	3	2.5	9	650	10.7	3	22	right	10300	12		In stock
203 (**)	8	203.2	225	9	3	2.5	9	650	10.9	3	17.5	right	11000	12		On demand

* CODE 912805 VACUPRESS FLEX PLUS

VACUPRESS® FLEX


Tubo in PVC plastificato a due strati con spirale in acciaio zincato incorporata e rinforzo in fibra poliestere, per aspirazione e mandata liquidi.

912934



Two-layer plasticized PVC hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of liquids.

- SUPERFICI LISCE**
 SMOOTH SURFACE *****
- FLESSIBILITÀ**
 FLEXIBILITY *****
- RESISTENZA ALL'ABRASIONE**
 ABRASION RESISTANCE ISO 4649:<160 mm³±10%
- TEMPERATURA D'IMPIEGO**
 TEMPERATURE RANGE -25° C + 60°C
- RESISTENZA CHIMICA**
 CHEMICAL RESISTANCE tabella PVC
- RESISTENZA ALLO SCHIACCIAMENTO**
 CRUSHING RESISTANCE ***
- ANTI UV**
 ANTI-UV ***

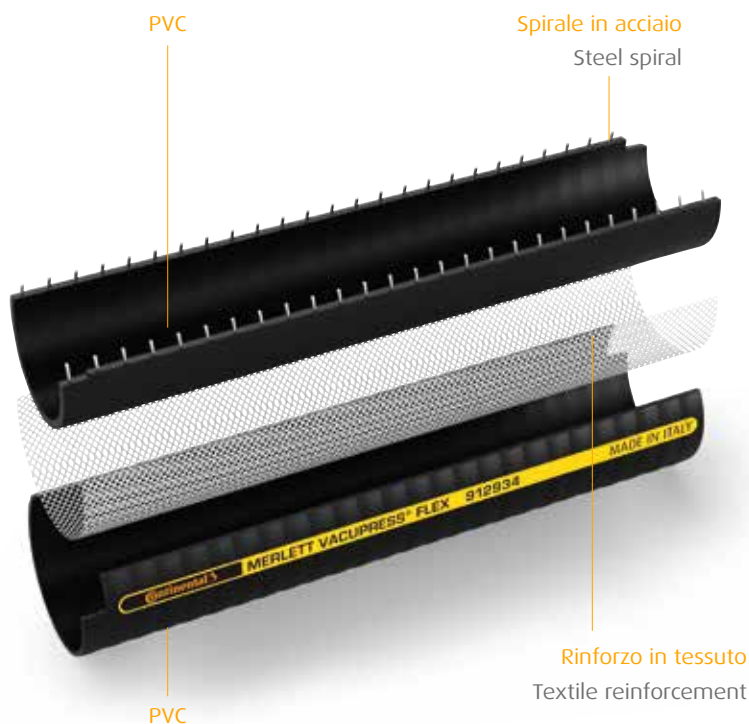

Ø INTERNO Ø I.D.	Ø INTERNO Ø I.D.	Ø ESTERNO Ø O.D.	PESO WEIGHT	RAGGIO CURVATURA BENDING RADIUS	PRESS. ESERCIZIO WORKING PRESS.	PRESS. SCOPPIO BURSTING PRESS.	SOTTOVUOTO VACUUM	LUNG. ROTOLI COIL LENGTH
inch	mm	mm	g/m	mm	bar	bar	m H ₂ O	mt
3/4	19	28	475	70	20	60	9	60
1	25	36	680	80	16	48	9	60
	30	40,5	770	90	16	48	9	60
	32	42,5	800	100	16	48	9	60
1 1/4	35	47	1100	115	14	42	9	60
	38	51	1200	125	14	42	9	30
1 1/2	40	52	1220	130	14	42	9	30
	45	58	1400	140	12	36	9	30
	50	63,5	1600	150	12	36	9	30
2 1/2	60	74	2000	180	12	36	9	30
	63	77	2100	190	12	36	9	30
	75	91	2950	190	12	36	9	30
3	76	92	2970	210	12	36	9	30
	80	96	3020	220	10	30	9	30
	90	106,5	3500	250	10	30	9	30
	100	117	4050	300	10	30	9	30
	102	119	4150	300	10	30	9	30
4	120	138	5430	350	8	24	9	20
	127	145	5950	370	7	21	9	20
5	150	169	7000	480	5	15	9	20
	152	171	7050	480	5	15	9	20
6	200*	222	10300	650	3	9	9	12
	203*	225	10500	650	3	9	9	12

* COD. 912805 VACUPRESS FLEX PLUS

