




HADICE (Inch - mm)	KONCOVKA (")	D (mm)	B (mm)	OBJEDNACÍ KÓD (*1)	
2"	50	2"	60,3	50	VICT20/TRN-88
3"	75	3"	88,9	75	VICT30-75/TRN-88
3"	80	3"	88,9	80	VICT30-80/TRN-88
4"	102	4"	114,3	102	VICT40/TRN-88
5"	125	5"	139,7	127	VICT50/TRN-88
6"	150	6"	165,1	152	VICT60-165/TRN-88
6"	150	6"	168,3	152	VICT60-168/TRN-88
8"	200	8"	219,1	202	VICT80-219/TRN-88

33901

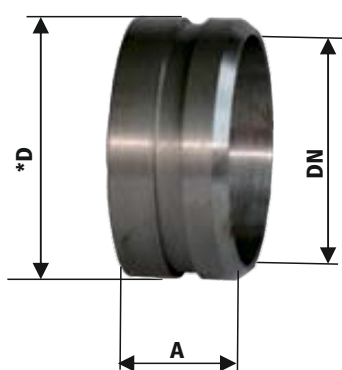

HADICE (Inch - mm)	KONCOVKA (")	D (mm)	A (mm)	OBJEDNACÍ KÓD (*1)	
2"	50	2"	60,3	40	VICT50/60,3-L40W
3"	80	3"	88,9	40	VICT80/88,9-L40W
4"	100 - 102	4"	108,0	40	VICT100/108,0-L40W
4"	100 - 102	4"	114,3	40	VICT100/114,3-L40W
5"	125	5"	139,7	40	VICT125/139,7-L40W
6"	150	6"	165,1	40	VICT150/165,1-L40W
6"	150	6"	168,3	40	VICT150/168,3-L40W
8"	200	8"	219,1	40	VICT200/219,1-L40W
10"	254	10"	273,0	50	VICT254/273,0-L50W

33902



HADICE (1. mm - 2. mm)	KONCOVKA (")	D1 (mm)	D2 (mm)	OBJEDNACÍ KÓD (*1)	
80	50	3" - 2"	88,9	60,3	VICT30/20REDUKCE
100	80	4" - 3"	114,3	88,9	VICT40/30REDUKCE
125	100	5" - 4"	139,7	114,3	VICT50/40REDUKCE
150	80	6" - 3"	168,3	88,9	VICT60/30REDUKCE
150	100	6" - 4"	168,3	114,3	VICT60/40REDUKCE
150	125	6" - 5"	168,3	139,7	VICT60/50REDUKCE
200	100	8" - 4"	219,1	114,3	VICT80/40REDUKCE
200	150	8" - 6"	219,1	168,3	VICT80/60REDUKCE
250	150	10" - 6"	273,0	168,3	VICT100/60REDUKCE

**Provozní teplota:** -40°C až +70°C

**Bezpečnost:** 2,5 : 1

**Použití:** Doprava betonu vysokotlakými čerpadly do 80 bar. V místě spojení dvou průměrů by neměl tlak přesáhnout 34,5 bar, což je tlak uvedený pro Victaulic redukce.