FEP



Caratteristiche principali

- **Alta trasparenza**
- **Pressione da 8 a 40 bar**
- **Normativa FDA 21 CFR, Reg. UE 1935/2004, Reg. UE 10/2011**

Main features

- ***High transparency***
- ***Pressure from 8 to 40 bar***
- ***Compliant with FDA 21 CFR, Reg. EU 1935/2004, Reg. EU 10/2011***

Caratteristiche tecniche

- **Caratteristiche tecnico-costruttive:**

Tubazioni in FEP. Elevata resistenza chimica e ambientale. Elevata temperatura di esercizio. Perfetta trasparenza ed assenza di porosità.

- **Applicazioni:**

Passaggio sostanze chimiche altamente aggressive, acqua potabile, vapore e carburanti anche in ambienti aggressivi e ad altissima temperatura.

- **Temperature di utilizzo:**

-200°C +205°C

- **Rapporto di sicurezza:**

1:3

- **Specifiche:**

FDA 21 CFR 177.1550
Reg. UE 10/2011, Reg CE 1935/2004
D.M. 174 del 06/04/2004

Technical Features

- ***Technical-constructive features:***

FEP tubing. Very high chemical and environmental resistance. Very high working temperature. Perfect transparency and lack of microporosity.

- ***Applications:***

Conductions of highly aggressive substances, drinking water, steam and fuels even in aggressive environments and at very high temperature.

- ***Working temperatures:***

-200°C +205°C


- ***Safety ratio:***

1:3

- ***Specifications:***

FDA 21 CFR 177.1550
Reg. EU 10/2011, Reg EC 1935/2004
Italian D.M. 174 of 06/04/2004

Coefficiente di correzione della pressione in funzione della temperatura
Pressure correction factor as function of temperature

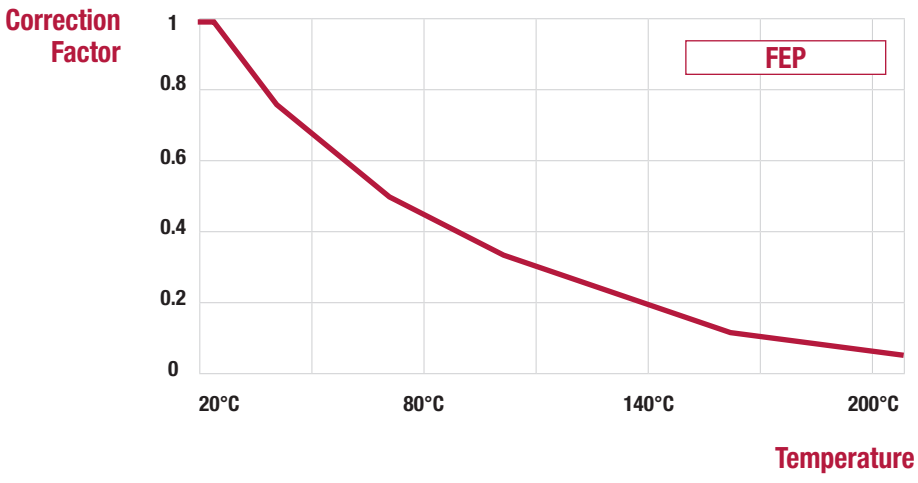

Scheda tecnica - *Data Sheet*

	ID	OD	T	1:3 WP	R MIN		g
CODE	mm	mm	mm	bar	mm	Colors	g/m
FEP42T	2	4	1	40	8	T	22
FEP64T	4	6	1	20	30	T	37
FEP86T	6	8	1	13	45	T	51
FEP108T	8	10	1	10	100	T	66
FEP1210T	10	12	1	8	150	T	80

T: Crystal