


AGRA4ALL SD /10 140°C

SUCTION AND DELIVERY MULTIPURPOSE FOOD HOSE

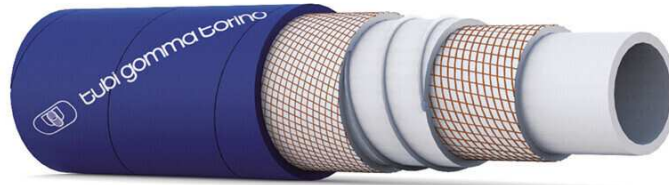

APPLICATION

Suction and delivery multipurpose hose, for fatty foods, wine, beer, potable water, etc

TUBE

White, smooth EPDM rubber compound, food quality odourless and taste free

REINFORCEMENT

High strength synthetic plies with steel wire spirals

COVER

Blue, smooth, cloth impression EPDM rubber, resistant to abrasion, ozone and weather

WORKING TEMPERATURE

-40°F +284°F sterilization at 230°F for 30 minutes
-40°C +140°C sterilizzazione a 110°C massimo 30'

SPECIFICATIONS

FDA title 21 art.177.2600 (f) for fatty foods, BfR, ADI free, PHTHALATE free, D.M. 21/03/73, GE 1935/2004

ID		OD		WEIGHT	WP		BP		BENDING RADIUS	VACUUM	COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	mm	bar	m
19	3/4	29	1 9/64	0.62	10	150	30	450	80	0.9	40
25	1	35	1 3/8	0.78	10	150	30	450	125	0.9	40
30	1 3/16	42	1 21/32	1.00	10	150	30	450	150	0.9	40
32	1 1/4	44	1 47/64	1.20	10	150	30	450	160	0.9	40
38	1 1/2	50	1 31/32	1.40	10	150	30	450	190	0.9	40
40	1 37/64	52	2 15/32	1.45	10	150	30	450	200	0.9	40
45	1 25/32	57	2 1/4	1.61	10	150	30	450	230	0.9	40
51	2	64	2 17/32	1.90	10	150	30	450	255	0.9	40
60	2 23/64	73	2 7/8	2.25	10	150	30	450	300	0.9	40
63.5	2 1/2	77	3 5/16	2.38	10	150	30	450	320	0.9	40
65	2 9/16	79	3 7/64	2.66	10	150	30	450	325	0.9	40
70	2 3/4	84	3 5/16	2.71	10	150	30	450	390	0.9	40
76	3	90	3 35/64	3.07	10	150	30	450	440	0.9	40
80	3 5/32	94	3 45/64	3.20	10	150	30	450	450	0.9	40
90	3 35/64	104	4 15/16	4.08	10	150	30	450	460	0.9	40
102	4	118	4 41/64	4.42	10	150	30	450	560	0.9	40
152	6	172	6 49/64	8.30	10	150	30	450	820	0.9	40

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING

