
PETROCORD /10

FUEL AND MINERAL OIL DELIVERY HOSE

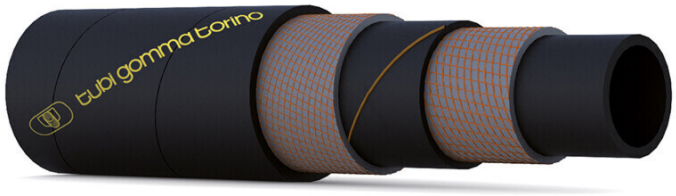

APPLICATION
Delivery hose for fuels and petroleum derivates with aromatic contents up to 50%

TUBE
Black, smooth **NBR** rubber compound

REINFORCEMENT
High strength synthetic plies and 1 copper wire for hose grounding

COVER
Black, smooth, cloth impression **SBR**/**NBR**/**PVC** rubber compound, resistant to oils, fuels, ozone and weather

WORKING TEMPERATURE
-22°F +176°F
-30°C +80°C

ID		OD		WEIGHT	WP		BP		COIL LENGTH
mm	inch	mm	inch	kg/m	bar	psi	bar	psi	m
19	3/4	29	1 9/64	0.55	10	150	30	450	40/61
25	1	35	1 3/8	0.70	10	150	30	450	40/61
28	1 7/64	38	1 1/2	0.76	10	150	30	450	40/61
30	1 3/16	40	1 37/64	0.80	10	150	30	450	40/61
32	1 1/4	42	1 21/32	0.85	10	150	30	450	40/61
35	1 3/8	45	1 25/32	0.92	10	150	30	450	40/61
38	1 1/2	48	1 57/64	0.96	10	150	30	450	40/61
40	1 37/64	51	2	1.05	10	150	30	450	40/61
42	1 21/32	53	2 15/16	1.15	10	150	30	450	40/61
45	1 25/32	56	2 13/64	1.20	10	150	30	450	40/61
51	2	62	2 7/16	1.35	10	150	30	450	40/61
60	2 23/64	72	2 53/64	1.70	10	150	30	450	40/61
63.5	2 1/2	75	2 61/64	1.80	10	150	30	450	40/61
76	3	91	3 37/64	2.56	10	150	30	450	40/61
102	4	118	4 41/64	3.60	10	150	30	450	40/61

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING



Tubi Gomma Torino S.p.a. 15040 Mirabello Monferrato (AL) - ITALY - Strada Statale 31 - km 39,4 Nr. 42
Ph: +39 0142.641300 Fax: +39 0142.641350 e-mail: com@tubigommatorino.it

Copyright © TUBI GOMMA TORINO S.p.a. - All rights reserved. The texts and images are owned by Tubi Gomma Torino S.p.A. Even partial reproduction of the catalog is prohibited. In the continuous search for technical and functional improvements, Tubi Gomma Torino S.p.A reserves the right to make changes to its products, which can be made without notice.